

FILTRATION

Berlin Filter 750mm - 1200mm (Sand bed depth: 0.6m)

Description:

Fibreglass wound, with a dust-repellent coating, 400mm diameter lid fixed with S/S bolts. Complete with pressure gauge, manual air vent and water purge valves. Maximum operating pressure 250 kPa (2.5 bar). Test pressure: 375 kPa.

Ordering:

Multiport valve or valve manifold must be ordered separately.

Warranty Guide:



2 year full plus 8 year pro rate warranty on filter tank and 1 year full warranty on internal components, gauges and valves. Refer to instructions and website for full warranty details



Model Flows at 50m3 / HR / m2 Filter Area	Product Code	Filter Area m2	Connections
Berlin Filter 750mm - 20,000 LPH	00543-0100	0.50m2	50mm
50mm Multiport Valve - Side Mount	17888		50mm
Berlin Filter 900mm - 30,000 LPH	00544	0.60m2	65mm
65mm Multiport Valve - Side Mount	24837		65mm
65mm Unions to suit 65mm MPV	02359		65mm
Berlin Filter 1050mm - 43,000 LPH	00545	0.80m2	65mm
65mm Multiport Valve - Side mount	24837		65mm
65mm Unions to suit 65mm MPV	02359		65mm
Berlin Filter 1200mm - 56,000 LPH	00546	1.13m2	80mm
80mm Multiport Valve with con - nections	18515		80mm

Side Mount Filter

	00543	00544	00545	00546
D mm	750	900	1050	1200
H mm	1050	1145	1300	1450
M mm	610	685	810	870
N mm	380	415	500	560
Connections	2"	65mm	65mm	80mm
Flow m3/h	21	30	43	56
Approx. Pool m3	115-170	170-240	240-350	350-450
Sand / Gravel kg	300	525	575/300	800/300
Net weight kg	27.5	43.4	83	93
Packing volume m3	0.26	0.99	1.92	2.75

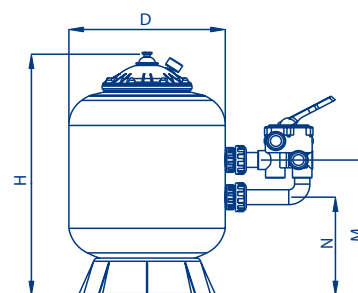

Rainbow Pool Products

PO Box 2388, Mansfield Qld 4122

Telephone STD 61-7-3849 5385

Facsimile STD 61-7-3849 5384

Email: info@rainbowpoolproducts.com.au

Web: www.rainbowpoolproducts.com.au