

FILTRATION

Praga Filters (Sand bed depth: 1.0m)

Description:

Bobbin wound fibreglass commercial filters with diameters from 1050mm to 3000mm. Filter lid is 400mm diameter with air purge valve, 20mm slotted laterals in parallel layout, sand dump port, water drain valve, pressure gauge panel. Maximum operating pressure 250 kPa and 400 kPa models available.

Options:

Vinylester interior lining, nozzle plate underdrain, sightglass, side manhole, valve batteries. When ordered with nozzle plate collector we recommend the inclusion of a side manhole, specify size and position (225mm, 400mm, 500mm or 600mm).

Ordering:

Refer to Options Page for option codes and pricing.

Warranty guide:

2 year full plus 8 year pro rata warranty on filter tank and 1 year full warranty on internal components, gauges, valves. Refer to instructions and website for full warranty details

* EUROPEAN PIPE CONNECTIONS



Tanks - Maximum working pressure: 250 kPa (2.5 bar) - Test pressure 375 kPa


Model	Product Code	Velocity m3/h/m2	Flow Rate m3/hr	Connections
Praga Filter Ø 1050	00687	20	17	63 mm*
Praga Filter Ø 1050	00694	30-40	25-34	65 mm
Praga Filter Ø 1200	00688	20-30	22-33	65 mm
Praga Filter Ø 1200	00702	40	45	80mm
Praga Filter Ø 1400	00689	20	30	65 mm
Praga Filter Ø 1400	00696	30	46	80 mm
Praga Filter Ø 1400	00703	40	61	100mm
Praga Filter Ø 1600	00690	20	40	80mm
Praga Filter Ø 1600	00697	30-40	60-80	100mm
Praga Filter Ø 1800	00691	20	50	80mm
Praga Filter Ø 1800	00698	30	76	100mm
Praga Filter Ø 1800	00705	40	101	125mm*
Praga Filter Ø 1800	00711	40	101	140mm
Praga Filter Ø 2000	00692	20	62	100mm
Praga Filter Ø 2000	00699	30	94	125mm*
Praga Filter Ø 2000	00706	40	125	140mm*
Praga Filter Ø 2000	05083	40	125	160mm
Praga Filter Ø 2350	00693	20	87	125mm*
Praga Filter Ø 2350	00700	30	130	140mm*
Praga Filter Ø 2350	04935	40	175	150mm
Praga Filter Ø 2500	08695	20	100	140mm*
Praga Filter Ø 2500	08696	30	150	150mm
Praga Filter Ø 2500	08697	40	200	200 mm*
Praga Filter Ø 3000	08699	20	140	150 mm
Praga Filter Ø 3000	08700	30	212	200mm *

FILTRATION

Praga Filters (Sand bed depth: 1.0m)

Tanks - Maximum working pressure: 400 kPa (4.0 bar) - Test pressure 600 kPa

Model	Product Code	Velocity m3/h/m2	Flow Rate m3/hr	Connections
Praga Filter Ø 1050	09209	20	17	63 mm*
Praga Filter Ø 1050	00712	30-40	25-34	65 mm
Praga Filter Ø 1200	00713	20-30	22-33	65 mm
Praga Filter Ø 1200	00719	40	45	80 mm
Praga Filter Ø 1400	09210	20	30	65 mm
Praga Filter Ø 1400	00714	30	46	80mm
Praga Filter Ø 1400	00720	40	61	100 mm
Praga Filter Ø 1600	09211	20	40	80 mm
Praga Filter Ø 1600	00715	30-40	60-80	100mm
Praga Filter Ø 1800	09212	20	50	80mm
Praga Filter Ø 1800	00716	30	76	100mm
Praga Filter Ø 1800	00722	40	101	125mm*
Praga Filter Ø 2000	09213	20	62	100mm
Praga Filter Ø 2000	00717	30	94	125mm*
Praga Filter Ø 2000	00723	40	125	140mm*
Praga Filter Ø 2350	09214	20	87	125mm*
Praga Filter Ø 2350	09217	30	130	140mm*
Praga Filter Ø 2350	09220	40	175	150mm
Praga Filter Ø 2500	09215	20	100	140mm*
Praga Filter Ø 2500	09218	30	150	150mm
Praga Filter Ø 2500	09221	40	200	200 mm*

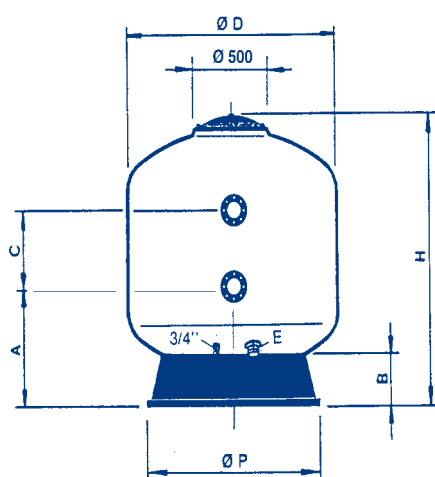

Ø (mm)	1,050	1,200	1,400	1,600	1,800	2,000	2,350	2,500	3,000
Flange Ø (mm)	-	-	-	-	-	-	-	-	-
Height of filtration sand (m)	1	1	1	1	1	1	1	1	1
H (mm)	1,640	1,780	1,755	1,835	1,875	2,040	2,520	2,550	2,750
B (mm)	200	230	240	260	280	300	340	340	350
A (mm)	540	570	585	680	720	790	965	1,080	1,110
C (mm)	645	640	610	515	465	510	600	450	440
Ø P (mm)	755	940	1,085	1,230	1,370	1,550	1,859	1,859	2,650
E (mm)	90	90	90	140	140	140	140	140	140
Filtration surface (m2)	0.86	1.13	1.54	2.01	2.54	3.14	4.34	4.90	7.07
Volume (l)	1,050	1,500	2,000	2,600	3,400	4,400	8,045	9,050	12,800
Sand 0.4-0.8mm (kg)	950	1,375	1,650	2,150	2,800	3,800	5,275	5,950	8,600
Gravel 1-2mm (kg)	300	300	450	675	750	1,050	1,800	2,200	3,300
Total Weight in operation (kg)	2,000	2,700	3,700	4,900	6,100	7,900	12,550	13,760	20,200



Rainbow Pool Products

PO Box 2388, Mansfield Qld 4122

Telephone STD 61-7-3849 5385

Facsimile STD 61-7-3849 5384

Email: info@rainbowpoolproducts.com.au

Web: www.rainbowpoolproducts.com.au