INNOVATIVE POOL PUMP

APPLICATION

Ideal for pool filtration, in-floor pool cleaning systems, connection to external pool controllers, heat pumps and gas heaters. Suitable for pools from up to 110,000 litres.



HIGH EFFICIENCY, SUPER QUIET, WATER COOLED DESIGN

- > Super Quiet Designed with a unique water-cooled motor which captures noise and vibrations, allowing super-quiet operation, rated down to 50 dBa. Your neighbours won't even know it's there.
- > Fully Variable Speed Control The ProMaster offers the pool owner and operator total control over the speed at which the pump needs to operate, from 1,500rpm to 3,600rpm
- > Energy Efficiency 8 Star energy rating offering up to 70% lower energy use than a traditional fixed speed 1hp pump*
- > Backwash Function ProMaster is designed with a selectable backwash cycle that runs the pump for 2 minutes at 3,800rpm before shutting down. It provides for safe, reliable and easy operation of the pump when backwashing your media filter.
- > **Dependable** ProMaster incorporates unique loss of prime protection to minimise pump damage if no water is available to the pump.
- > Convenient By water cooling the motor, ProMaster does not require air ventilation, and gives installers more flexibility with pump positioning
 - Easy to install set and operate, no complicated digital push button controls
 - Automatic restart technology
 - Large 4.5 litre leaf basket for long intervals between cleaning
 - Over temperature derating, pump will automatically slow down in high ambient temperatures
- > Double insulated to water circuit provided with an Equipotential Bonding Point for AS/NZ 3000 wiring standards


*Running your pump at low speed uses less energy to turnover the same amount of pool water.



DAVEY

ProMaster


VSD200 Pool Pump

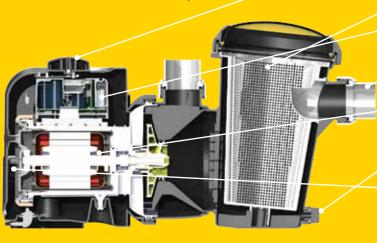


- Variable Frequency Drive with selectable speed dial from 1500rpm to 3600rpm (Backwash mode at 3800rpm)
- Large Leaf Basket with easy to remove, clear lid
- Loss of prime protection to protect the pump when there is no water inside the pump
- Quality ABS quick coupling barrel unions for simple installation
- High performance water cooled motor for super quiet, efficient use all year round
- Drain plug enables quick draining of the casing for easy removal and maintenance
- Double insulated to water circuit with Equipotential Bonding Point

ELECTRICAL DATA							
Voltage (V)	240						
Supply frequency (Hz)	50						
Motor input power (W/hp)	116W/0.16hp @ Dial 1 488W/0.65hp @ Dial 5 1,000W/1.34hp @ Dial 10 1316W/1.76hp @ Backwash						
Motor speed (rpm)	1,500 to 3,600						
Backwash (rpm)	3800						
Enclosure class (IP)	45						
Insulation class	F						
Power lead length	3m						
Approval No.	SGS-150025						

OPERATING LIMITS	Max. water temperature	Max. ambient temperature	Noise level (AS 5102.2)
	40°C	50°C	50 dBa (at Speed 1)

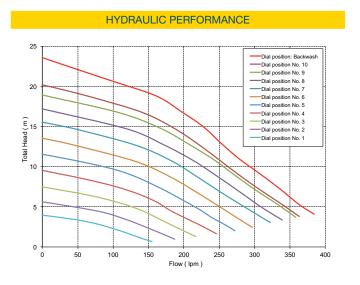

DIMENSIONS (mm)												
Model	Α	В	С	D	Е	F	G	Н	1	Mounting Holes Diameter	Inlet/Outlet PVC	Net Weight (kg)
PM200SV	305	670	320	350	65	230	380	200	250	10	40/50	14

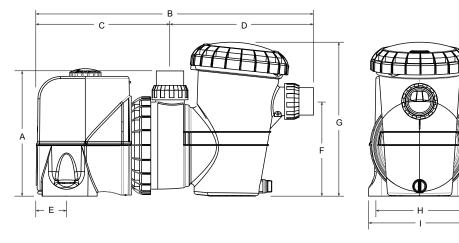



Rainbow Pool Products

PO Box 2388, Mansfield Qld 4122 Telephone STD 61-7-3849 5385 Facsimile STD 61-7-3849 5384

Email: info@rainbowpoolproducts.com.au Web: www.rainbowpoolproducts.com.au