


SUBMERSIBLE SUMP PUMPS

Drenox Range



- The Onga Drenox range 250/10 is constructed entirely of 304 grade stainless steel, including a cast stainless steel impeller. 80/7 is 304 grade stainless steel with a plastic impeller.
- Includes a heat exchange chamber to cool the motor for long periods of unsubmerged operation, and an oil chamber for lubrication of the seal.
- Suitable for continuous operation. Drenox 80/7 drains down to a level of 3mm.

• Drenox Range Performance

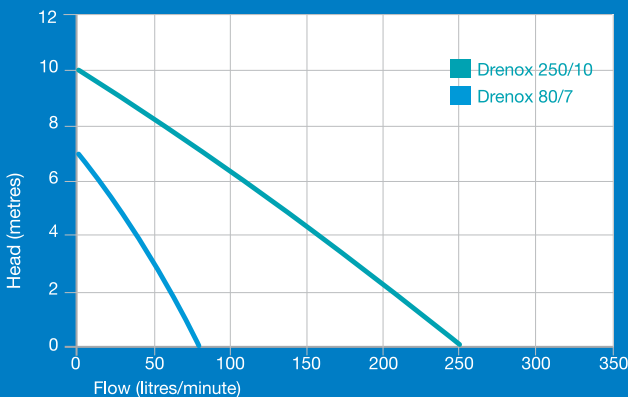


| MODEL | Product code | Free Passage | Voltage | kW | |
|---------------|--------------|--------------|---------|------|------|
| | | | | P1 | P2 |
| DRENOX 80/7 | P1031020 | 3mm | 230V | 0.30 | 0.20 |
| DRENOX 250/10 | P1031400 | 6mm | 230V | 0.90 | 0.55 |

Omnia 160/7



- The Onga Omnia 160/7 includes all the great features of the Drenox and includes a vortex impeller so that it can pass larger solids.
- Dual oil-lubricated NBR70 lip seal on a hard ceramic shaft.

• Omnia 160/7 Performance

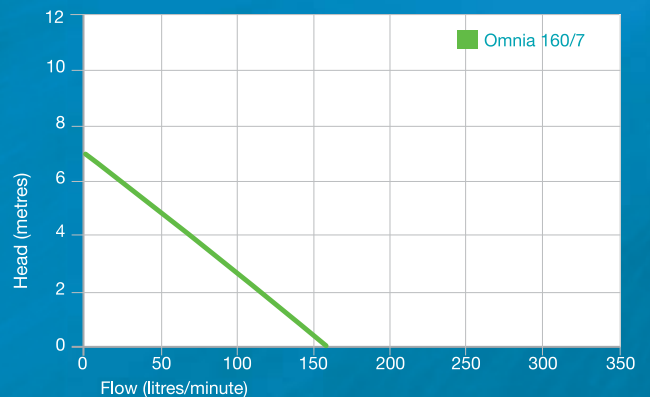

| MODEL | Product code | Free Passage | Voltage | kW | |
|-------------|--------------|--------------|---------|------|------|
| | | | | P1 | P2 |
| OMNIA 160/7 | P2081010 | 20mm | 230V | 0.90 | 0.37 |

SUBMERSIBLE SUMP PUMPS

Biox 300/10



- The Onga Biox is a submersible vortex pump that includes both a lip seal with sand guard and a carbon-ceramic mechanical seal
- 2" discharge connection enables soft solids up to 40mm in diameter
- Suitable for continuous use
- Motor must remain submerged for cooling

VF150




- The VF150 is a single phase drainage pump with cast iron construction making it durable and providing a longer life cycle
- Contains a vortex impeller capable of handling soft solids up to 15mm
- Optimum performance reaches 80 litres per minute at 4 metres head
- Automatic float switch operation protects pump against dry running
- Lip seal and dual mechanical seal for improved service life


Applications:

- Septic effluent disposal, water transfer, grey water and sump pumping liquid including grey water (of neutral pH with soft solids up to 15mm at a 10% content or fine solids at 1% concentration).

• Biox 300/10 Performance

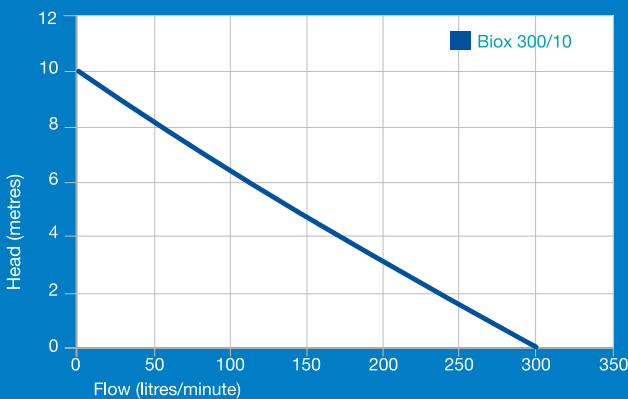

• VF150 Performance

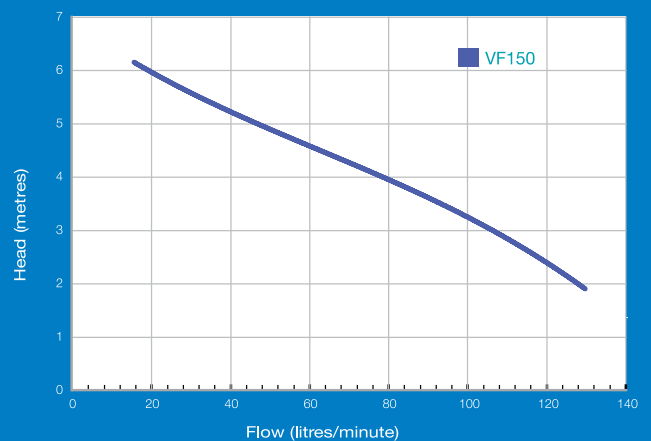

| MODEL | Product code | Free Passage | Voltage | kW | |
|-------------|--------------|--------------|---------|------|------|
| | | | | P1 | P2 |
| BIOX 300/10 | P2091010 | 40mm | 230V | 0.90 | 0.60 |

| MODEL | Watts (P2) | Nominal Current (Amps) | Full Load Current (Amps) |
|-------|------------|------------------------|--------------------------|
| VF150 | 180 | 1.4 | 2.0 |