




## COMMERCIAL STARTING BLOCKS - MODEL SPU

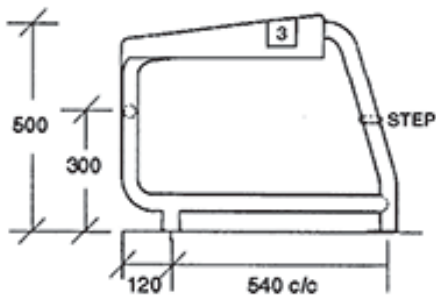

### Model SPU Starting Block

Code	Description	Front Legs	Rear Legs
PDA781	SPU.F	Flanged	Flanged
PDA782	SPU.R	150mm socket	Capped
PDA783	SPU.A	Adjustable	150mm socket
Universal design - suits deck height 200mm above water line.			

## SPECIFICATIONS

### Model SPU Starting Block

The Pooldeck SP series of starting platforms are made of T316 polished stainless steel 38 mm $\varnothing$  with a 500 mm x 500 mm non-slip pattern blue fibreglass top with numbers. The SPU platform is designed for a flat coping / concourse.

**Material:** Stainless Steel 38 mm $\varnothing$  mirror finish frame with 500mm x 500mm non-slip blue fibreglass top.

**Which one is right for me:** The starting platform must physically fit the coping / concourse. There is the coping height, coping width and water depth issues to address. Regulatory guidelines for competition and recreational swimming may also need to be observed. We can help choose the platform right for you. We need coping width, coping height from concourse, coping height from water level and water depth before we can recommend a platform that will suit your requirements.

**Removable:** Two legs are 150 mm longer which allows them to sit into the PSSP post socket that are core drilled and glued into the coping / concourse. The other two legs have adjustable feet with lock nuts fitted.

**Flanged:** A flange allows you to fix the starting platform to the coping / concourse using a bolt and plug set or similar. (3 per flange)

**Universal design:** Suits deck height 200mm above water line.