

Waterco Multiport Valves




Heavy duty construction



Constructed from heavy duty ABS and GFPP, Waterco Multiport valves are designed for maximum performance and working pressures.


- 6-position multiple valve positions
- Top and Side Mount configurations
- Rated at 400 kPa

Waterco's entire range of Multiport valves are engineered to withstand a working pressure of up to 400 kPa (58 psi) with a test pressure of 600 kPa (87 psi).

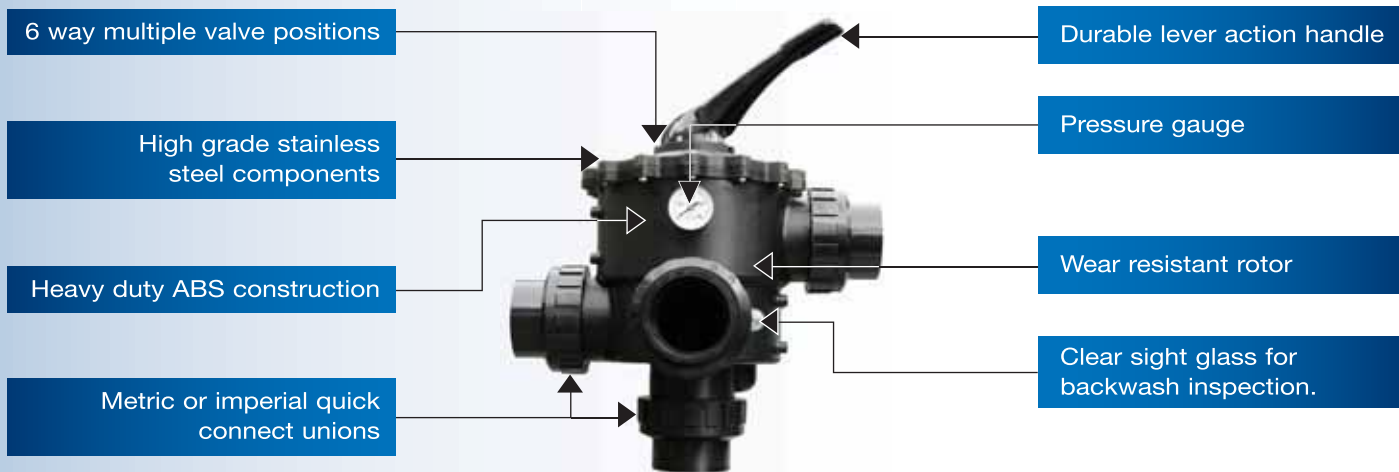

	Max flow rate	Body	Lid	Handle	Rotor	Hardware	Union Nut	Union Tail
40mm MPV	320	ABS	ABS	ABS	GF Noryl	SS304	ABS	PVC
50mm MPV	510	ABS	ABS	ABS	GF Noryl	SS304	ABS	PVC
65mm MPV	780	ABS	GFPP	ABS	GF Noryl	SS304	ABS	PVC
80mm MPV	1080	GFPP	GFPP	ABS	GF Noryl	SS304	ABS	PVC


The flow characteristics of the 65mm Multiport valve, make it ideal for the Micron S1050 and S1200 filters.

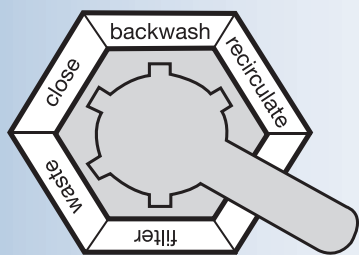

MULTIPORT VALVE MAIN FUNCTIONS

- Filter - downward flow through the filter bed to outlet
- Backwash - upward flow through the filter bed to waste
- Rinse - downward flow through the filter bed to waste
- Waste - bypass the filter bed to waste
- Re-circulate - bypass the filter bed to outlet
- Closed - no flow to the filter

Cleansing a filter simply requires shifting the Multiport lever from the "filter" position to the "backwash" position, which reverses the flow of water in the filter, flushing the filter bed.

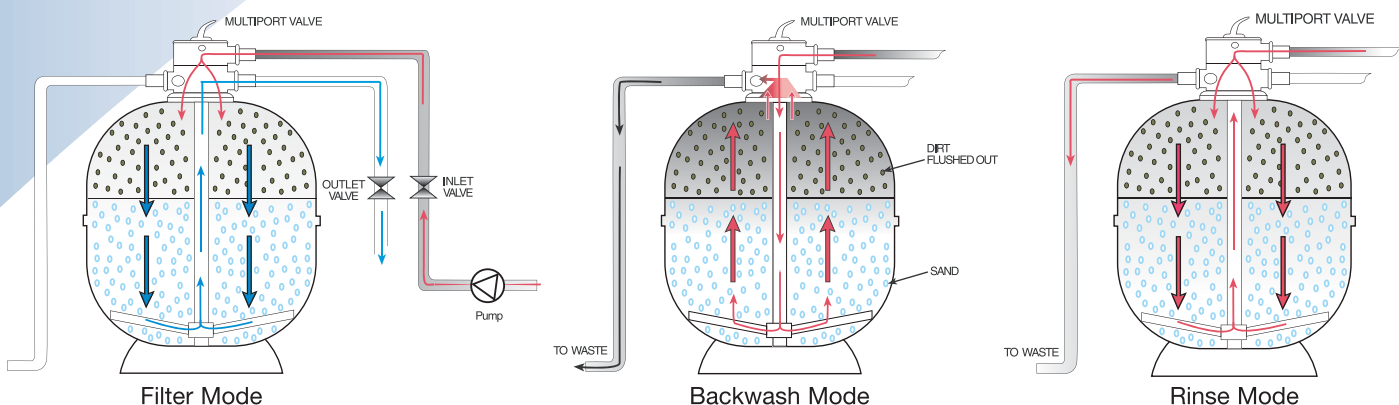

Warranty
Waterco Multiport valves are covered by 1 year warranty.



Rainbow Pool Products

PO Box 2388, Mansfield Qld 4122

Telephone STD 61-7-3849 5385

Facsimile STD 61-7-3849 5384

Email: info@rainbowpoolproducts.com.au

Web: www.rainbowpoolproducts.com.au