

ELECTROCHLOR LCD



Code

2512635
 2514035

Description

Electrochlor 25A LCD - Self Clean 25 Amps
 Electrochlor 30A LCD - Self Clean 30 Amps

Electrochlor automatically generates chlorine to keep your swimming pool clean and healthy.

- Large LCD display
- In built pool monitor and pump protection
- Precision chlorine production controls
- Super Chlorination function
- High performance titanium electrolytic cell
- Self cleaning electrolytic cell (optional)
- 4 bar pressure rated salt cell housing


ElectroChlor Technical Specifications

Model	Input Watt kW (max)	Output current DC amp (max)	Chlorine production gram/hour	Max Pool Capacity Climate	
				< 26° C	> 26° C
25A / 25A SC	0.3125	25	25	150,000 litres	102,500 litres
30A / 30A SC	0.3750	30	30	180,000 litres	125,000 litres


	25A / 25A SC	30A / 30A SC
Primary input volts	220-240 VAC 50/60 Hz	220-240VAC50/60Hz
Input power	330W	380W
Max. total current	10A	10A
Pump outlet max.	8A	8A
Cell volts	6-8V	6-8V
Degr. of protection to AS1939	IP23	IP23

- All units are equipped with a 3 amp self-resetting fuse.
- Pool capacity is based on a stabilised swimming pool with a minimum salt level of 5,000 ppm.



ElectroChlor Power Pack Dimensions



ElectroChlor Self Clean Cell Dimensions

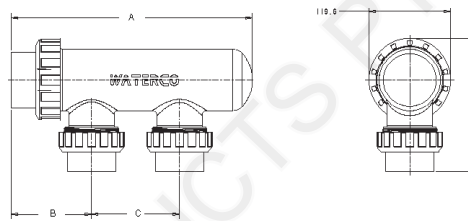

ElectroChlor Standard Cell Dimensions



Model	A	B	C	D
30 SC	423.5mm	136.5mm	280mm	188.8mm
	353.5mm	117.5mm	129mm	194.3mm

Model	A	B	C	D
25A / 30A	385mm	275mm	96mm	163mm