



## Rainbow Pool Products

PO Box 2388, Mansfield Qld 4122  
 Telephone STD 61-7-3849 5385  
 Facsimile STD 61-7-3849 5384  
 Email: info@rainbowpoolproducts.com.au  
 Web: www.rainbowpoolproducts.com.au

# WATERCO

Water, the Liquid of Life

# Trimline Cartridge Filters

Compact and Economical Filtration



Trimline cartridge filters are compact, economical filters designed to effectively filter out suspended solids from your pool.




Trimline cartridge filters utilise a specially treated synthetic fabric which is pleated into a cartridge. Cartridge filters are ideal for applications where backwashing may not be practical.

## TRIMLINE CARTRIDGE FILTERS

Part Number	Product Description	Nominal Size
21450	Trimline CC50	
21475	Trimline CC75	
214100	Trimline CC100	

### Specifications

Product Description	Filter Area		Max. Flow Rate		Working Pressure		Pool Size		Overall Weight
	(m <sup>2</sup> )	(ft <sup>2</sup> )	lpm	m <sup>3</sup> /hr	kPa	psi	litres	m <sup>3</sup>	(kg)
Trimline CC50	4.6	50	190	11.4	350	50	68,400	68.4	8.6
Trimline CC75	6.9	75	280	16.8	350	50	100,800	100.8	10.5
Trimline CC100	9.3	100	380	22.8	350	50	136,800	136.8	14.0

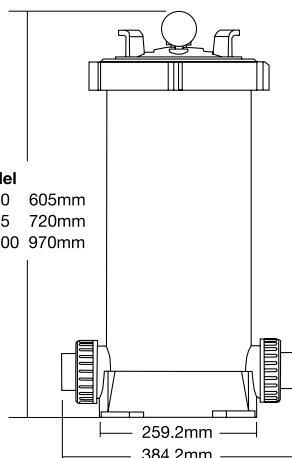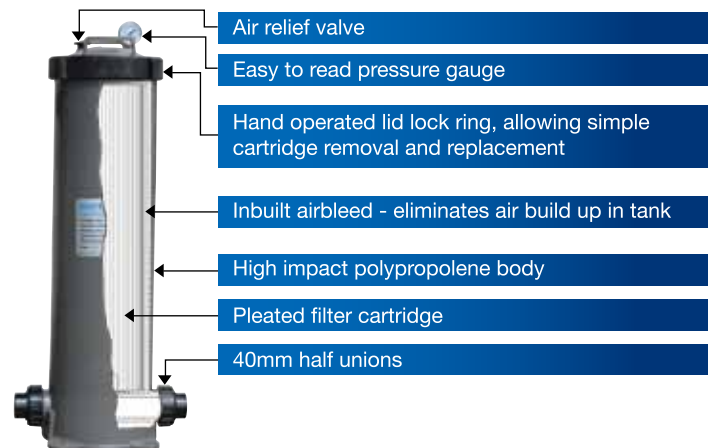

Model  
 CC50 605mm  
 CC75 720mm  
 CC100 970mm

### Trimline Pleated Filter Cartridge

The Trimline pleated filter cartridges are fabricated from pleated reusable polyester fabric. The media has been pleated to provide 4.6 to 9.3 square metres of surface area in order to maximise the cartridge dirt holding capacity and extend the time between cleaning.

**Material :** Polyester Fabric material, Vinyl Plastisol end caps and a Polypropylene core

**Operating Temperature :** 4°C to 50°C

**Maximum Pressure Drop :** 20 kPa

### Simple Maintenance

The filter cartridge is easily cleaned by hosing the pleats with a standard garden hose.

### Warranty

Waterco is proud to show its absolute confidence in its range of Trimline cartridge filters by offering a 10 (5+5) tank warranty and 1 year warranty on all other components.

Commercial applications attract a 1 year tank warranty.

