

## **Rainbow Pool Products**

PO Box 2388, Mansfield Qld 4122 Telephone STD 61-7-3849 5385 Facsimile STD 61-7-3849 5384 Email: info@rainbowpoolproducts.com.au Web: www.rainbowpoolproducts.com.au



# HYDROSTORM ECO PUNNP

# **Energy Saving 3 Speed Pump**

Equipped with an energy saving 3 speed motor, Hydrostorm ECO is capable of lowering its energy usage & reducing its operating noise levels.

- Energy Rating of 6 ½ Stars
- Innovative permanent magnet
  brushless DC motor
- Ultra quiet operation









www.waterco.com

# **Energy Saving**

Conventional pool pumps are limited to one set speed. A pool pump is usually sized to cater for the pool's maximum water flow requirements, which may either be the sand filter's backwash water flow or to provide sufficient water flow to operate a suction cleaner.




As the speed of a conventional pump cannot be changed, the same maximum water flow is applied across the pool's various requirements.

> Equipped with the very latest 3 speed permanent magnet brushless DC motor, Hydrostorm ECO is capable of lowering its motor speed, reducing water flow and lowering its energy consumption.

# **3 Speed Options**

Hydrostorm ECO's 3 speed options cater for most pool functions.

- High speed Vacuuming and backwash 1% of the time
- Medium speed Automatic pool cleaners
- Low speed Filtration 99% of the time



As a pool's filtration cycle occupies 99% of the run time of a pool pump, you can operate the Hydrostorm ECO on its low speed setting for a majority of its running time, leading to significant energy savings.

Hydrostorm ECO can slash its energy use by up to 67%, by operating it at low speed.

# **Benefits of Slow Flow**

Lowering a pumps flow rate not only significantly decreases the pump's energy requirements, but also reduces water flow resistance in your pool equipment and plumbing. Even though you may need to operate the Hydrostorm ECO longer, it is far more efficient pumping low water flow compared to high water flow.


A slow flow rate also has the added benefit of improving your pool's filtration efficiency, enhancing the clarity of your swimming pool water. Plus your automatic chemical dosers and salt chlorinators are also more effective when the pool water is circulated longer.





## **Ultra Quiet**

Hydrostorm ECO operates most economically and with the lowest noise level at its low speed setting. Its low speed setting significantly reduces the pump's vibration, motor noise and water turbulence to an ultra low 64.5 decibels (dBA).

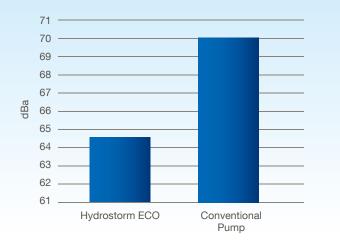


# **Key Features**

- 1. 3 speed control panel, IP55 rating
- Permanent magnet brushless
  3 speed DC motor
- 3. UV stabilised & corrosion resistant
- 4. 50mm quick connect barrel unions for UPVC pipe
- 5. Clear basket lid & large 2.1lt strainer basket
- High grade carbon/ graphite mechanical seal with 316 stainless steel spring assembly
- 7. Strong single piece glass filled thermoplastic pump body
- 8. Drain plugs
- 9. Stable support base
- 10. Hydraulically efficient impeller and diffuser design
- 11. Fan cooled thermal overload protection
- 12. Motor protection bracket protects the motor from a leaking mechanical seal

## **Off-Peak Operation**

Its low noise levels enable it to be operated at times that are not allowable for conventional pool pumps. A Hydrostorm ECO allows you to take advantage of off-peak electrical tariff periods, without upsetting your neighbours.

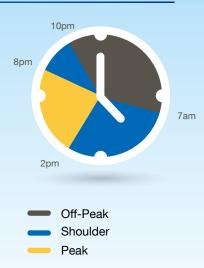

Hydrostorm ECO can save you hundreds of dollars off your energy bill.

F

#### **Motor Protection Bracket**

The "Motor Protection Bracket" adds a 60.5mm separation between the pump wet end and motor. The bracket also has larger drain holes for improved draining of any water leaks due to long-term wear of the main mechanical seal.

4


10

7



9

Ð

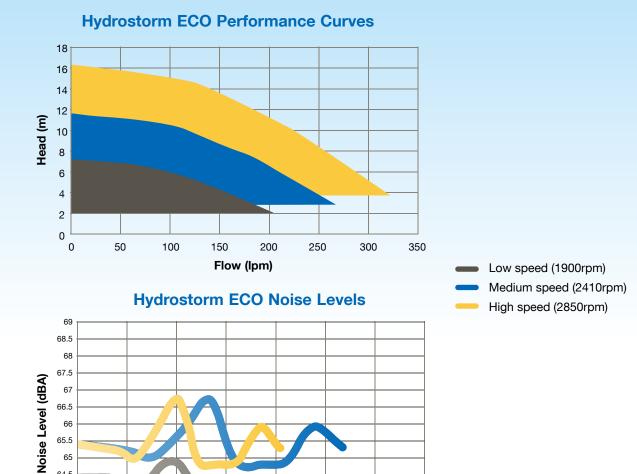

<image><section-header><section-header><section-header><section-header>

Flow (lpm)



#### Warranty

Pumps	3 years (conditional)*
Wet End	3 years
Motor, mechanical seal, hair & lint pot lid, o'ring, basket, impeller & diffuser	2 years
Commercial applications	1 year
Labour	1 year

\*Please refer to Waterco's warranty terms and conditions

## **Specifications**

Length (mm)	Height (mm)	Width (mm)	Packaged Weight (kg)
651	340	227	10

# Medium speed (2410rpm)

Pump Total Head (m)	Flow Rate (lpm)	Motor Input (kW)	Amps	Noise Level (dBA)
6.8	215	0.62	4.6	67.9
8.5	190	0.61	4.6	68.5
10.0	162	0.61	4.6	68.8


## Low speed (1900rpm)

Pump Total Head (m)	Flow Rate (lpm)	Motor Input (kW)	Amps	Noise Level (dBA)
4.3	142	0.32	2.5	63.9
5.6	122	0.32	2.5	64.1
6.9	101	0.32	2.4	63.5

# High speed (2850rpm)

Pump Total Head (m)	Flow Rate (lpm)	Motor Input (kW)	Amps	Noise Level (dBA)
6.7	288	0.94	7.1	72.3
9.6	255	0.97	7.3	72.7
10.6	223	0.98	7.3	72.2

## **Dimensions (mm)**

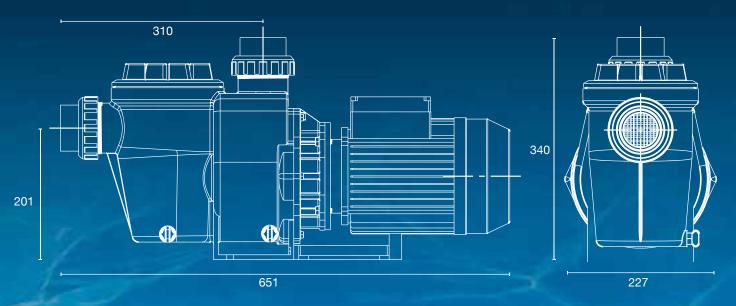



## **Rainbow Pool Products**

PO Box 2388, Mansfield Qld 4122 Telephone STD 61-7-3849 5385 Facsimile STD 61-7-3849 5384 Email: info@rainbowpoolproducts.com.au Web: www.rainbowpoolproducts.com.au